



Spett.le

ATS SARDEGNA - ASL 3 NUORO

Via Amerigo Demurtas, 1

08100 Nuoro

C.A. Sig.ra Liliana Sapa

Con riferimento alla vostra richiesta, vi sottoponiamo la nostra migliore offerta

OFFERTA

Data: 03/02/2022

- IVA: Esclusa
- Pagamento:
- Minimo fatturabile: € 150,00
per ordini minori di € 150,00 verranno addebitate le spese di gestione (€ 30,00)
- Tempi di consegna: 4 gg
- Resa: Franco Vs. magazzino
- Imballaggio: Incluso
- Garanzia: 12 mesi
- Validità offerta: Dicembre 2022

Codice	Descrizione	Prezzo unitario	Q.tà	Sc	Totale
DL USB LOG200	Datalogger USB _ LOG200	90,00 €	5		450,00 €

Totale IVA Esclusa	€ 450,00
IVA 22%	€ 99,00
Totale	€ 549,00

Codice	Descrizione	Prezzo unitario	Q.tà	Sc	Totale
DL USB M1	Datalogger USB _ M1	82,00 €	5		410,00 €

Totale IVA Esclusa	€ 410,00
IVA 22%	€ 90,20
Totale	€ 500,20

ASL3 NUORO

PG/2022/3580 del 10/02/2022 ore 16,08
Mitt.: M & G INT. SRL

Ass.: Servizio Giuridico Amministrativo
Class.: 1.1.



M. & G. INT.'L SRL

SEDE LEGALE: Via Catani 37 - 59100 Prato - C.F. e P.IVA: 05041920967 -
Capitale Sociale € 10.000,00 i. v.

SEDE OPERATIVA E UFFICI AMMINISTRATIVI: Via Manzoni 20 - 20838 RENATE (MB)
Tel. +39.0362 1708557 - Fax +39.0362 1851368

www.meg-intil.com - meg@meg-intil.com




ISO 9001:2015
CERTIFICATO N. 1475/2021



ISO 13485
CERTIFICATO N. 0447/2020

tempmate.® - M1

Multi-Use PDF USB Data Logger for Cold Chain Temperature Monitoring

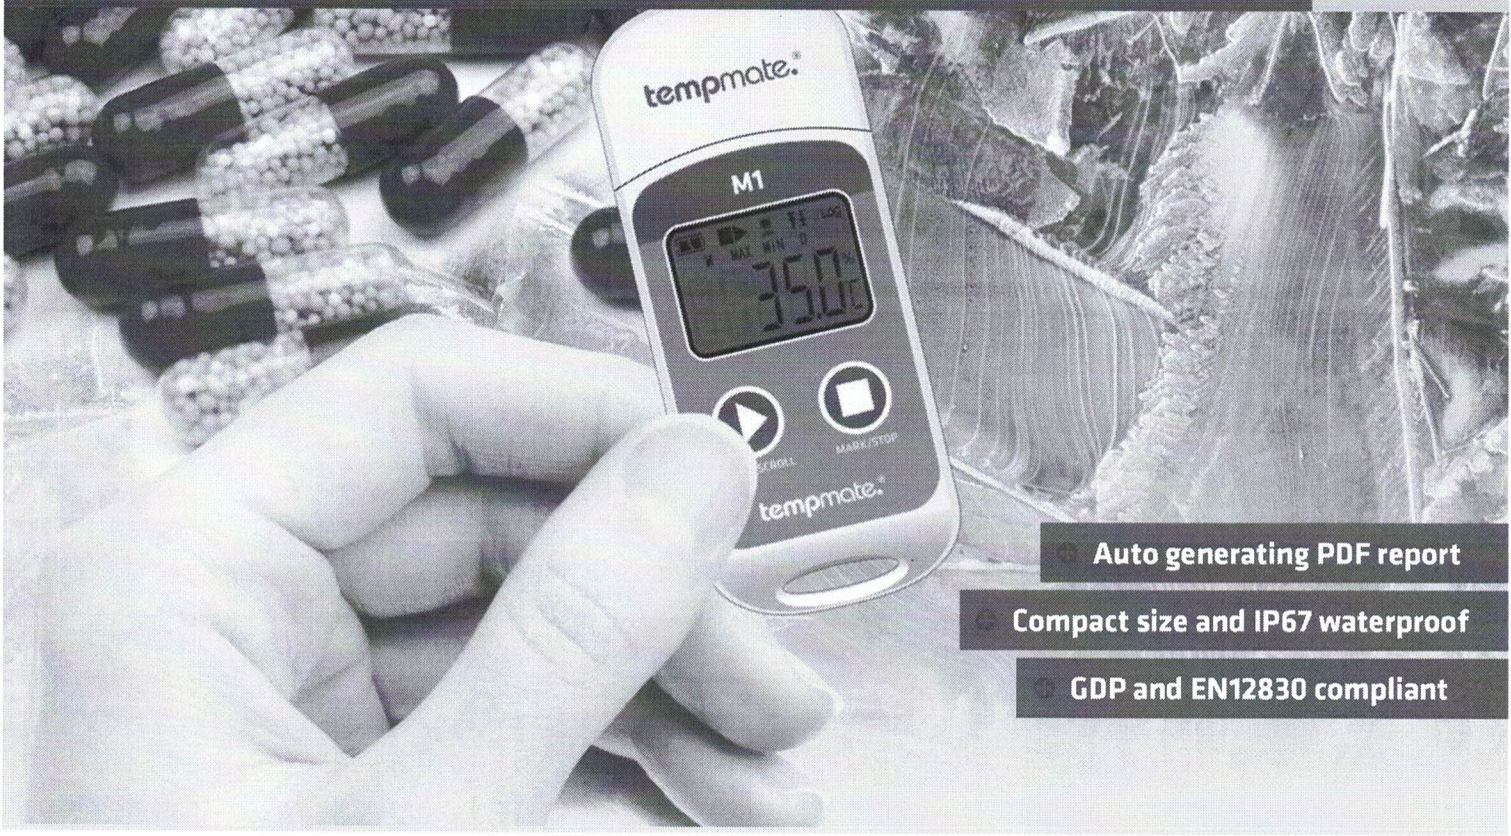

- Auto generating PDF report
- Compact size and IP67 waterproof
- GDP and EN12830 compliant



PHARMACEUTICAL PRODUCTS



FOOD & PRODUCE



TECHNICAL PRODUCTS

Intuitive Multi-Use Temperature Logger for reliable low-cost cold chain monitoring.

tempmate.®-M1 our best data loggers for temperature recording with internal or external temperature sensor, multifunction display and automatic PDF report generation.



tempmate.com



USB connection



IP 67 protected



Temperature range -30°C to +70°C



EN 12830 Compliant




Automatic PDF report



GDP compliant

tempmate.[®]-M1


If temperature matters.

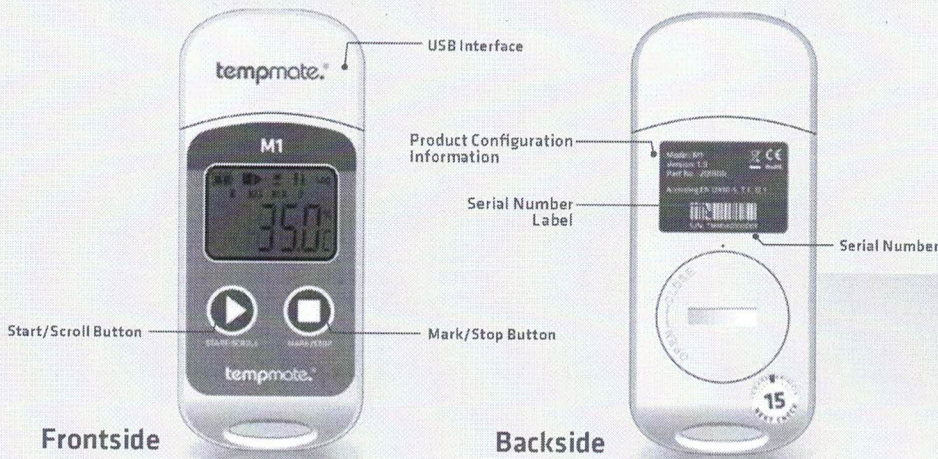

tempmate.[®]-M1 Accessories



ACB100
Wall mount bracket for tempmate.[®]-M1




TSN100
External temperature sensor for tempmate.[®]-M1


Easy Handling




01 Ready to use due to pre-configuration or after software setup



02 Attach started tempmate.[®] to your shipment



03 Connect stopped logger directly to USB port



04 Automated PDF report with all important details

Curious about your cold chain? tempmate.[®]-M1 continuously monitors all relevant data.

tempmate.[®]-M1 loggers are specially designed for temperature monitoring in pharmaceutical cold chain logistics. As pre-programmed device tempmate.[®]-M1 can be instantly used to control your temperature sensitive consignment. The PDF report created contains detailed information such as data curve, every single measurement as a table and statistical information. With the optional free available tempbase.[®] software, you can ensure individual logger configuration and detailed data analysis or data management is also possible.

Your Benefits at a Glance

- + Product-related temperature monitoring along the entire cold chain, in warehouses or fridges
- + Cost-effective and reliable
- + Smart design, intuitive operation
- + Waterproof and food compatible
- + Free available software for individual logger configuration
- + Detailed PDF report including graph and table
- + Multifunction display with battery indicator

Technical Specifications

Temperature Sensor	NTC internal and external optional
Measuring Range	-30°C to +70°C (-40°C to +90°C with ext. Sensor)
Accuracy	±0.5°C (at -20 °C to +40 °C)
Resolution	0.1 °C
Response Time T90	11 min. (30 sec. with ext. Sensor)
Data Storage	32,000 values
Display	Multifunction LCD
Start Setting	Manually by pressing button or automatically programmed start time
Recording Time	By customer programmable / up to 12 months

Interval	10 Sec. up to 24 hours
Alarm Settings	adjustable up to 5 alarm limits
Alarm Type	Single alarm or cumulative
Battery	CR2032 / replaceable by customer
Dimensions	80mm x 34mm x 14mm (L x W x D)
Protection Class	IP67
System Requirements	PDF Reader
Connection Interface	USB 2.0, A-Type
Certification	12830, calibration certificate, CE, RoHS
Software	tempbase. [®] Lite 1.0 software / free download
Interface to PC	integrated USB port
Automatic PDF Reporting	yes



